

Premier Appraisals and Inspections, LLC

3901 La Vida Way Cape Coral, FL 33993 Phone: 239-283-0098 www.premierappraise-inspect.com

Wind Mitigation Report



13076 Cross Creek Ct Fort Myers

Prepared for Country Club Village II Condo Association

By Michael Kronenberger HI4244

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 03/05/2020				
Owner Information				
Owner Name: Country Club Village II Con	ndo Association		Contact Person:	
Address: 13076 Cross Creek Ct	A+ (-7+)		Home Phone:	
City: Fort Myers	Zip:	33912	Work Phone:	
County: Lee			Cell Phone:	
Insurance Company: N/A			Policy #:	
Year of Home: 1987	# of Stories: 2		Email:	
NOTE: Any documentation used in valid accompany this form. At least one photo though 7. The insurer may ask additional	graph must accompa I questions regarding	ny this form to valid g the mitigated featur	ate each attribute marked re(s) verified on this form.	in questions 3
 Building Code: Was the structure built the HVHZ (Miami-Dade or Broward con 	unties), South Florida	Building Code (SFBC	-94)?	
A. Built in compliance with the FBC a date after 3/1/2002: Building Perm	nit Application Date (M	(M/DD/YYYY)	199 - 2	200
B. For the HVHZ Only: Built in conprovide a permit application with a	date after 9/1/1994: Bi	uilding Permit Applica		94, 1995, and 1996
C. Unknown or does not meet the re	quirements of Answer	r "A" or "B"		
 Roof Covering: Select all roof covering OR Year of Original Installation/Replace covering identified. 				
	Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance
√ 1. Asphalt/Fiberglass Shingle 9/2	9/2014			
2. Concrete/Clay Tile				
3. Metal				
4. Built Up				
5. Membrane				
6. Other				
A. All roof coverings listed above minstallation OR have a roofing perm				
B. All roof coverings have a Miami- roofing permit application after 9/1/				
C. One or more roof coverings do no	ot meet the requiremen	nts of Answer "A" or "	'B".	
D. No roof coverings meet the requi	rements of Answer "A	A" or "B".		
3. Roof Deck Attachment: What is the we	akest form of roof de	ck attachment?		
A. Plywood/Oriented strand board (by staples or 6d nails spaced at 6" al shinglesOR- Any system of screw mean uplift less than that required for	OSB) roof sheathing a long the edge and 12" vs, nails, adhesives, oth	nttached to the roof tru in the fieldOR- Batt ner deck fastening syst	en decking supporting woo	d shakes or wood
B. Plywood/OSB roof sheathing wi 24"inches o.c.) by 8d common nails other deck fastening system or truss a maximum of 12 inches in the field	spaced a maximum o rafter spacing that is	f 12" inches in the fiel shown to have an equi	dOR- Any system of screw valent or greater resistance	ws, nails, adhesives,
C. Plywood/OSB roof sheathing wi 24"inches o.c.) by 8d common nails decking with a minimum of 2 nails Any system of screws, nails, adhesiv	spaced a maximum o per board (or 1 nail pe	f 6" inches in the field r board if each board i	OR- Dimensional lumber s equal to or less than 6 incl	/Tongue & Groove hes in width)OR-
Inspectors Initials MLK Property Addre	ss 13076 Cross Cree	ek Ct	Fort Myers	<u>19</u>
Approximate the first terminal and the second		100 N N N N	253 g g 46 304 579 3	SE 19
*This verification form is valid for up to to OIR-B1-1802 (Rev. 01/12) Adopted by Ru		a no material change	es nave been made to the s	tructure. Page 1 of 5

Form SCNLGL - "TOTAL" appraisal software by a la mode, inc. - 1-800-ALAMODE

ina	recuracies found on the form. R-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 Page 2 of 5
	his verification form is valid for up to five (5) years provided no material changes have been made to the structure or
In	B. No SWR. C. Unknown or undetermined. Spectors Initials MLK Property Address 13076 Cross Creek Ct Fort Myers
o.	 Secondary Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss.
•	C. Other Roof Any roof that does not qualify as either (A) or (B) above.
	B. Flat Roof Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft
	A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: feet; Total roof system perimeter: feet
5.	<u>Roof Geometry:</u> What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
	G. Unknown or unidentified H. No attic access
	F. Other:
	both sides, and is secured to the top plate with a minimum of three nails on each side. E. Structural Anchor bolts structurally connected or reinforced concrete roof.
	a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on
	 □ D. Double Wraps □ Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with
	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
	position requirements of C or D, but is secured with a minimum of 3 nails. C. Single Wraps
	 ✓ Metal connectors that do not wrap over the top of the truss/rafter, or ✓ Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail
	☑ B. Clips
	 Secured to truss/rafter with a minimum of three (3) nails, and Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
	Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are:
	☐ Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
	A. Toe Nails Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
4.	Roof to Wall Attachment: What is the WEAKEST roof to wall connection? (Do not include attachment of hip/valley jacks within 5 feet of the inside or outside corner of the roof in determination of WEAKEST type)
	G. No attic access.
	F. Unknown or unidentified.
	□ D. Reinforced Concrete Roof Deck.□ E. Other:
	or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least 182 psf.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

	ening Protection Level Chart		Glazed O	penings		207223	Glazed enings
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		X	X	X	İ	×
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IN	Other protective coverings that cannot be identified as A, B, or C						Ž.
х	No Windborne Debris Protection	X				X	

A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at
a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval
system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure
and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996

Southern Standards Technical Document (SSTD) 12
 For Skylights Only: ASTM E 1886 and ASTM E 1996
For Garage Doors Only: ANSI/DASMA 115
A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
B. Exterior Opening Protection - Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
 ASTM E 1886 and ASTM E 1996 (Large Missile – 4.5 lb.)
• SSTD 12 (Large Missile – 4 lb. to 8 lb.)
 For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)
B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

Inspectors Initials MLK Property Address 13076 Cross Creek Ct

Page 3 of 5

Fort Myers

N. Exterior Opening Protection (unverified shutter a protective coverings not meeting the requirements of A with no documentation of compliance (Level N in the t	nswer "A", "B", or C" or sys	
N.1 All Non-Glazed openings classified as Level A, B, C,	or N in the table above, or no No	n-Glazed openings exist
N.2 One or More Non-Glazed openings classified as Level table above		7.117.000 VALES VALES CONTROL
N.3 One or More Non-Glazed openings is classified as Lev	el X in the table above	
X. None or Some Glazed Openings One or more Glaze	ed openings classified and Le	evel X in the table above.
MITIGATION INSPECTIONS MUST I Section 627.711(2), Florida Statutes, prov		
Qualified Inspector Name: Michael Kronenberger	License Type: Home Inspector	License or Certificate #:
Inspection Company:	Tionic mapector	Phone:
Premier Appraisals and Inspections, LLC		239-283-0098
Qualified Inspector - I hold an active license as a	: (check one)	
Home inspector licensed under Section 468.8314, Florida Statut training approved by the Construction Industry Licensing Board		
Building code inspector certified under Section 468.607, Florida	a Statutes.	
General, building or residential contractor licensed under Section	n 489.111, Florida Statutes.	
Professional engineer licensed under Section 471.015, Florida S	tatutes.	
Professional architect licensed under Section 481.213, Florida S		
Any other individual or entity recognized by the insurer as posse verification form pursuant to Section 627.711(2), Florida Statute	essing the necessary qualification es.	ns to properly complete a uniform mitigation
Individuals other than licensed contractors licensed under under Section 471.015, Florida Statues, must inspect the st Licensees under s.471.015 or s.489.111 may authorize a dinexperience to conduct a mitigation verification inspection. I,Michael Kronenberger am a qualified inspector : (print name) contractors and professional engineers only) I had my emple and I agree to be responsible for his/her work. Qualified Inspector Signature:An individual or entity who knowingly or through gross not subject to investigation by the Florida Division of Insurance appropriate licensing agency or to criminal prosecution. (Secretifies this form shall be directly liable for the misconduct performed the inspection. Homeowner to complete: I certify that the named Qualifier residence identified on this form and that proof of identification Signature:	ructures personally and not rect employee who possesses and I personally performed oyee (the requisite skill, knowledge, and the inspection or (licensed) perform the inspection f inspector) 2020 fraudulent mitigation verification form is t to administrative action by the da Statutes) The Qualified Inspector who horized mitigation inspector personally
An individual or entity who knowingly provides or utters a obtain or receive a discount on an insurance premium to w of the first degree. (Section 627.711(7), Florida Statutes) The definitions on this form are for inspection purposes on	hich the individual or entity	y is not entitled commits a misdemeanor
as offering protection from hurricanes.	and calliot be used to te	, and product of construction leature
Inspectors Initials MLK Property Address 13076 Cross C		Fort Myers
*This verification form is valid for up to five (5) years provinaccuracies found on the form.	vided no material changes h	ave been made to the structure or
OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155		Page 4 of 5
		©2014 Bestinspectors, Net

Photograph Addendum

Client	Country Club Village II Condo Association						
Property Address	13076 Cross Creek Ct						
City	Fort Myers	County	Lee	State	FL	Zip Code	33912
Client	Country Club Village II Condo Association						





Front View



Left Side



Rear View



Right Side




Sheathing 8D Nail Form PIC6_LT - "TOTAL" appraisal software by a la mode, inc. - 1-800-ALAMODE

Photograph Addendum

Client	Country Club Village II Condo Association						
Property Address	13076 Cross Creek Ct						
City	Fort Myers	County Le	ee	State	FL	Zip Code	33912
Client	Country Club Village II Condo Association						



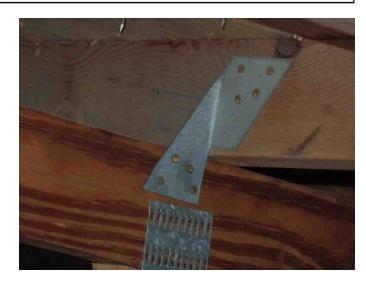

8D Nail Every 6 Inches





Unprotected Window

SWR Paperwork

